

# OUTRIDER - OUTlier in RNA-Seq fInDER

*Felix Brechtmann<sup>1</sup>, Christian Mertes<sup>1</sup>, Agne Matuseviciute<sup>1</sup>,  
Vicente Yepez<sup>1</sup>, Julien Gagneur<sup>1</sup>*

<sup>1</sup> Technische Universität München, Department of Informatics, Garching, Germany

December 11, 2018

## Abstract

In the field of diagnostics of rare diseases, RNA-seq is emerging as an important and complementary tool for whole exome and whole genome sequencing. [OUTRIDER](#) is a framework that detects aberrant gene expression within a group of samples. It uses the negative binomial distribution which is fitted for each gene over all samples. We additionally provide an autoencoder, which automatically controls for co-variation before fitting. After fitting, each sample can be tested for aberrantly expressed genes. Furthermore, [OUTRIDER](#) provides functionality to easily filter unexpressed genes, to analyse the data as well as to visualize the results.

If you use [OUTRIDER](#) in published research, please cite:


Brechtmann F\*, Mertes C\*, Matuseviciute A\*, Yepez V, Avsec Z, Herzog M, Bader D M, Prokisch H, Gagneur J; **OUTRIDER: A statistical method for detecting aberrantly expressed genes in RNA sequencing data;** *bioRxiv*; 2018

## Contents

1	Introduction . . . . .	3
2	Prerequisites . . . . .	4
3	A quick tour . . . . .	4
4	An <i>OUTRIDER</i> analysis in detail . . . . .	6
4.1	OutriderDataSet . . . . .	7
4.2	Preprocessing . . . . .	7
4.3	Controlling for Confounders . . . . .	9
4.3.1	Excluding samples from the autoencoder fit . . . . .	11
4.4	Fitting the negative binomial model . . . . .	12
4.5	P-value calculation . . . . .	13
4.6	Z-score calculation . . . . .	13
5	Results. . . . .	14
5.1	Results table . . . . .	14
5.2	Number of aberrant genes per sample . . . . .	15
5.3	Volcano plots . . . . .	16
5.4	Gene level plots. . . . .	17
6	Additional features . . . . .	19
6.1	Using PEER to control for confounders . . . . .	19
6.2	Power analysis . . . . .	20
	References . . . . .	21

## 1 Introduction


*OUTRIDER* (OUTlier in RNA-seq flNDER) is a tool for finding aberrantly expressed genes in RNA-seq samples. It does so by fitting a negative binomial model to RNA-seq read counts, correcting for variations in sequencing depth and apparent co-variations across samples. Read counts that significantly deviate from the distribution are detected as outliers. *OUTRIDER* makes use of an autoencoder to control automatically for confounders within the data. A scheme of this approach is given in Figure 1.

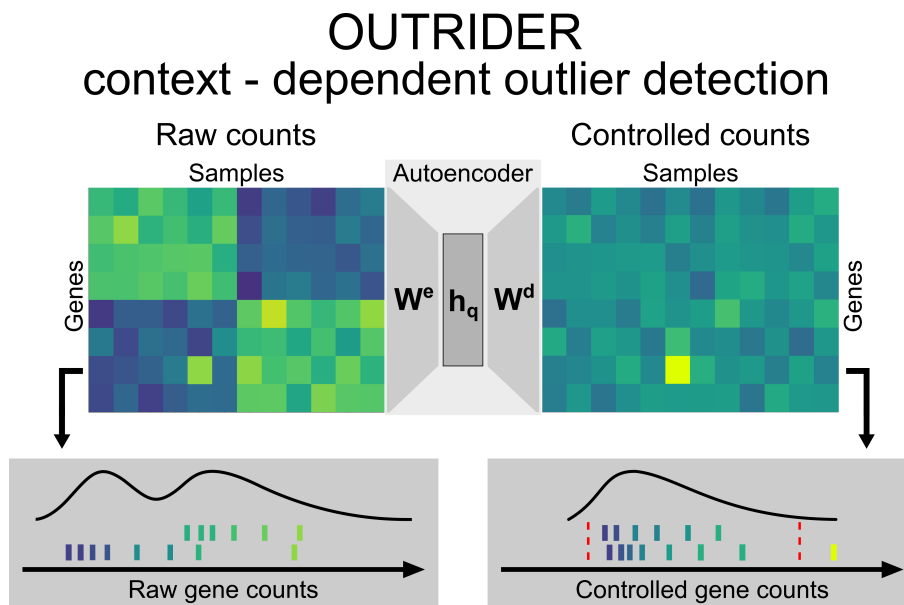

**Figure 1: Context-dependent outlier detection**

The algorithm identifies gene expression outliers whose read counts are significantly aberrant given the co-variations typically observed across genes in an RNA sequencing data set. This is illustrated by a read count (left panel, fifth column, second row from the bottom) that is exceptionally high in the context of correlated samples (left six samples) but not in absolute terms for this given gene. To capture commonly seen biological and technical contexts, an autoencoder models co-variations in an unsupervised fashion and predicts read count expectations. By comparing the earlier mentioned read count with these context-dependent expectations, it is revealed as exceptionally high (right panel). The lower panels illustrate the distribution of read counts before and after applying the correction for the relevant gene. The red dotted lines depict significance cutoffs.

Differential gene expression analysis from RNA-seq data is well-established. The packages *DESeq2*[1] or *edgeR*[2] provide effective workflows and preprocessing steps to perform differential gene expression analysis. However, these methods aim at detecting significant differences between groups of samples. In contrast, *OUTRIDER* aims at detecting outliers within a given population. A scheme of this difference is given in figure 2.

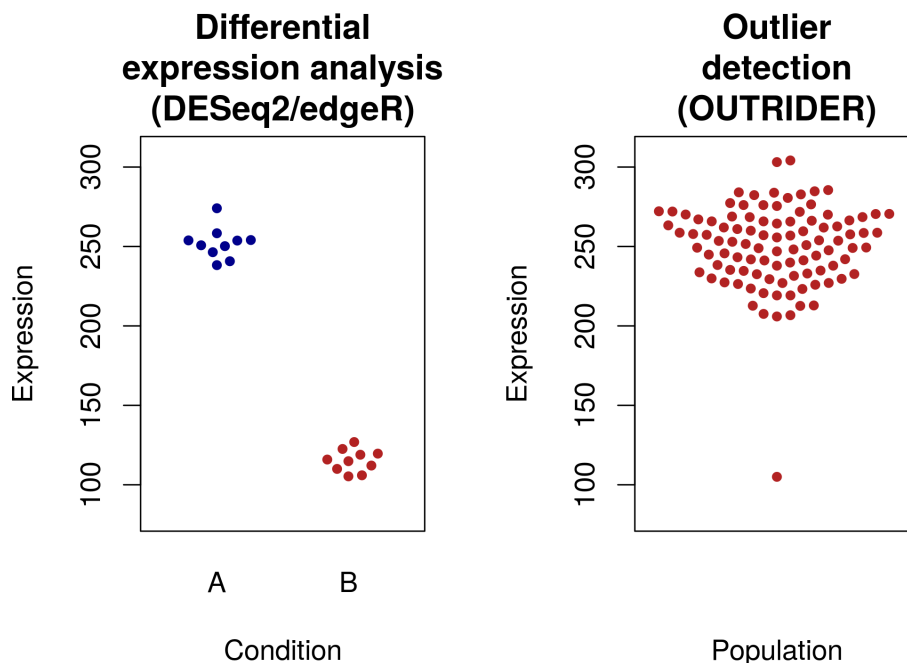

**Figure 2: Scheme of workflow differences**

Differences between differential gene expression analysis and outlier detection.

## 2 Prerequisites

---

To get started on the preprocessing step, we recommend to read the introductions of [DESeq2](#)[1], [edgeR](#)[2] or the RNA-seq workflow from Bioconductor: [rnaseqGene](#). In brief, one usually starts with the raw FASTQ files from the RNA sequencing run. Those are then aligned to a given reference genome. At the time of writing (October 2018), we recommend the STAR aligner[3]. After obtaining the aligned BAM files, one can map the reads to exons or genes of a GTF annotation file using HT-seq or by using [summarizedOverlaps](#) from [GenomicAlignments](#). The resulting count table can then be loaded into the [OUTRIDER](#) package as we will describe below.

## 3 A quick tour

---

Here we assume that we already have a count table and no additional preprocessing needs to be done. We can start and obtain results with 3 commands. First, create an *OutriderDataSet* from a count table or a Summarized Experiment object. Second, run the full pipeline using the command [OUTRIDER](#). In the third and last step the results table is extracted from the *OutriderDataSet* with the [results](#) function. Furthermore, analysis plots that are described in section 5 can be directly created from the *OutriderDataSet* object.

## OUTRIDER - OUTlier in RNA-Seq fInDER

```
library(OUTRIDER)

# get data
ctsFile <- system.file('extdata', 'KremerNBaderSmall.tsv',
  package='OUTRIDER')
ctsTable <- read.table(ctsFile, check.names=FALSE)
ods <- OutriderDataSet(countData=ctsTable)

# filter out non expressed genes
ods <- filterExpression(ods, minCounts=TRUE, filterGenes=TRUE)

# run full OUTRIDER pipeline (control, fit model, calculate P-values)
ods <- OUTRIDER(ods)

## [1] "Initial PCA loss: 4.73997327486604"
## [1] "Tue Dec 11 22:16:09 2018: Iteration: 1 loss: 4.19256077017367"
## [1] "Tue Dec 11 22:16:14 2018: Iteration: 2 loss: 4.17542505895479"
## [1] "Tue Dec 11 22:16:19 2018: Iteration: 3 loss: 4.166467891572"
## [1] "Tue Dec 11 22:16:22 2018: Iteration: 4 loss: 4.16181334414024"
## [1] "Tue Dec 11 22:16:27 2018: Iteration: 5 loss: 4.1580751210163"
## [1] "Tue Dec 11 22:16:30 2018: Iteration: 6 loss: 4.15557143637292"
## [1] "Tue Dec 11 22:16:33 2018: Iteration: 7 loss: 4.15345331963635"
## [1] "Tue Dec 11 22:16:35 2018: Iteration: 8 loss: 4.15240350424897"
## [1] "Tue Dec 11 22:16:39 2018: Iteration: 9 loss: 4.15092260220869"
## [1] "Tue Dec 11 22:16:41 2018: Iteration: 10 loss: 4.15020791273986"
## [1] "Tue Dec 11 22:16:43 2018: Iteration: 11 loss: 4.15000433691586"
## [1] "Tue Dec 11 22:16:44 2018: Iteration: 12 loss: 4.14968265971189"
## [1] "Tue Dec 11 22:16:45 2018: Iteration: 13 loss: 4.14959066391018"
## [1] "Tue Dec 11 22:16:48 2018: Iteration: 14 loss: 4.14872181854871"
## [1] "Tue Dec 11 22:16:51 2018: Iteration: 15 loss: 4.14787671107925"
## Time difference of 46.64425 secs
## [1] "15 Final nb-AE loss: 4.14787671107925"

# results (only significant)
res <- results(ods)
head(res)


##   geneID sampleID      pValue      padjust zScore l2fc rawcounts
## 1: ATAD3C  MUC1360 2.968181e-11 1.651103e-07   5.26  1.87      948
## 2: NBPF15  MUC1351 6.395232e-10 3.557461e-06   5.79  0.77     7591
## 3: MST01   MUC1367 4.064890e-09 2.261167e-05  -6.22 -0.81      761
## 4: HDAC1   MUC1350 1.668405e-08 9.280800e-05  -5.91 -0.78     2215
## 5: DCAF6   MUC1374 6.928882e-08 3.854313e-04  -5.68 -0.62     2348
## 6: NBPF16  MUC1351 2.241534e-07 6.234465e-04   4.84  0.67     4014
##   normcounts meanCorrected theta aberrant AberrantBySample AberrantByGene
## 1:      424.77      140.23  16.67      TRUE              1              1
```

## OUTRIDER - OUTlier in RNA-Seq fInDER

```
## 2:    7108.44    4368.01 111.15    TRUE        2        1
## 3:     856.07    1474.32 151.35    TRUE        1        1
## 4:    2403.23    3994.05 136.90    TRUE        1        1
## 5:    2964.63    4497.44 196.57    TRUE        1        1
## 6:    3786.87    2479.06 106.98    TRUE        2        1
##      padj_rank
## 1:         1
## 2:         1
## 3:         1
## 4:         1
## 5:         1
## 6:         2

# example of a Q-Q plot for the most significant outlier
plotQQ(ods, res[1, geneID])
```

Q-Q plot for gene: ATAD3C

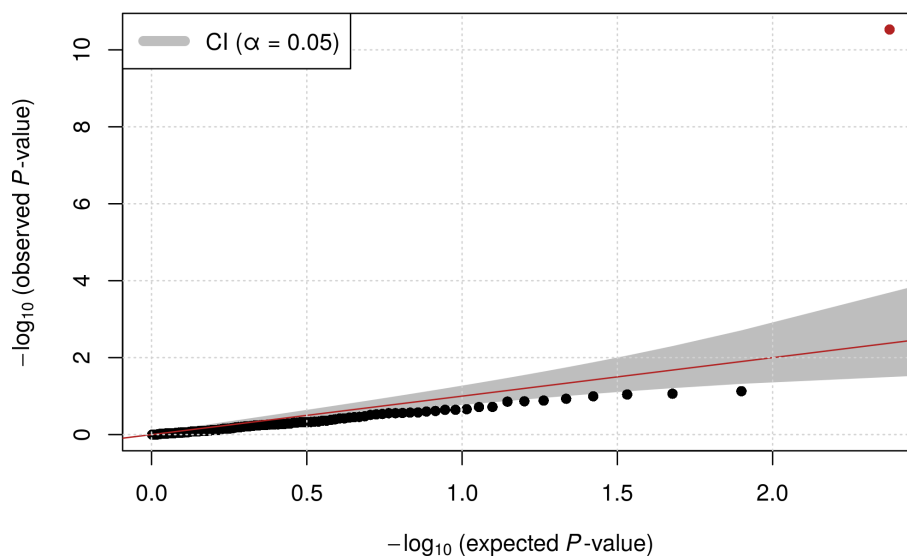

## 4 An *OUTRIDER* analysis in detail

Apart from running the full pipeline using the single wrapper function `OUTRIDER`, the analysis can also be run step by step. The wrapper function does not include any preprocessing functions. Discarding non expressed genes or samples failing quality measurements should be done manually before running the `OUTRIDER` function or starting the analysis pipeline.

In this section we will explain the analysis functions step by step.

## OUTRIDER - OUTlier in RNA-Seq fInDER

For this tutorial we will use the rare disease data set from Kremer *et al.*[4]. For testing purposes, this package contains a small subset of it.

### 4.1 OutriderDataSet

To use *OUTRIDER* create an *OutriderDataSet*, which derives from a *RangedSummarizedExperiment* object. The *OutriderDataSet* can be created by supplying a count matrix and optional sample annotation matrices. Alternatively, an existing Summarized experiment object from other Bioconductor packages can be used.

```
# small testing data set
odsSmall <- makeExampleOutriderDataSet(dataset="Kremer")

# full data set from Kremer et al.
URL <- paste0("https://media.nature.com/original/nature-assets/",
              "ncomms/2017/170612/ncomms15824/extref/ncomms15824-s1.txt")
ctsTable <- read.table(URL, sep="\t")

# create OutriderDataSet object
ods <- OutriderDataSet(countData=ctsTable)
```

### 4.2 Preprocessing

It is recommended to preprocess the data before fitting. Our model requires that for every gene at least one sample has a non-zero count and that we observe at least one read for every 100 samples. Therefore, all genes that are not expressed must be discarded.

We provide the function *filterExpression* to remove genes that have low FPKM (Fragments Per Kilobase of transcript per Million mapped reads) expression values. The needed annotation to estimate FPKM values from the counts should be the same as for the counting. Here, we normalize by the total exon length of a gene. To do so the joint length of all exons needs to be provided. When providing a gtf, gff or TxDb object to the *filterExpression*, we extract this information automatically. But therefore the geneID's of the count table and the gtf need to match.

By default the cutoff is set to an FPKM value of one and only the filtered *OutriderDataSet* object is returned. If required, the FPKM values can be stored in the *OutriderDataSet* object and the full object can be returned to visualize the distribution of reads before and after filtering.

```
# get annotation
library(TxDb.Hsapiens.UCSC.hg19.knownGene)
library(org.Hs.eg.db)
txdb <- TxDb.Hsapiens.UCSC.hg19.knownGene
```

## OUTRIDER - OUTlier in RNA-Seq fInDER


```
map <- select(org.Hs.eg.db, keys=keys(txdb, keytype = "GENEID"),  
              keytype="ENTREZID", columns=c("SYMBOL"))
```

However, the `TxDb.Hsapiens.UCSC.hg19.knownGene` contains only well annotated genes. This annotation will miss a lot of genes captured by RNA-seq. To include all predicted annotations as well as non-coding RNAs please download the txdb object from our homepage<sup>1</sup> or create it yourself from the UCSC website<sup>2,3</sup>.

```
library(RMySQL)  
library(AnnotationDbi)  
txdbUrl <- paste0("https://i12g-gagneurweb.in.tum.de/public/",  
                  "paper/mitoMultiOmics/ucsc.knownGenes.db")  
download.file(txdbUrl, "ucsc.knownGenes.db")  
txdb <- loadDb("ucsc.knownGenes.db")  
con <- dbConnect(MySQL(), host='genome-mysql.cse.ucsc.edu',  
                  dbname="hg19", user='genome')  
map <- dbGetQuery(con, 'select kgId AS TXNAME, geneSymbol from kgXref')
```

<sup>1</sup><https://i12g-gagneurweb.in.tum.de/public/paper/mitoMultiOmics/ucsc.knownGenes.db>  
<sup>2</sup><https://genome.ucsc.edu/cgi-bin/hgTables>  
<sup>3</sup>[http://genomewiki.ucsc.edu/index.php/Genes\\_in\\_gtf\\_or\\_gff\\_format](http://genomewiki.ucsc.edu/index.php/Genes_in_gtf_or_gff_format)

```
# calculate FPKM values and label not expressed genes  
ods <- filterExpression(ods, txdb, mapping=map,  
                        filterGenes=FALSE, savefpkm=TRUE)  
  
# display the FPKM distribution of counts.  
plotFPKM(ods)
```

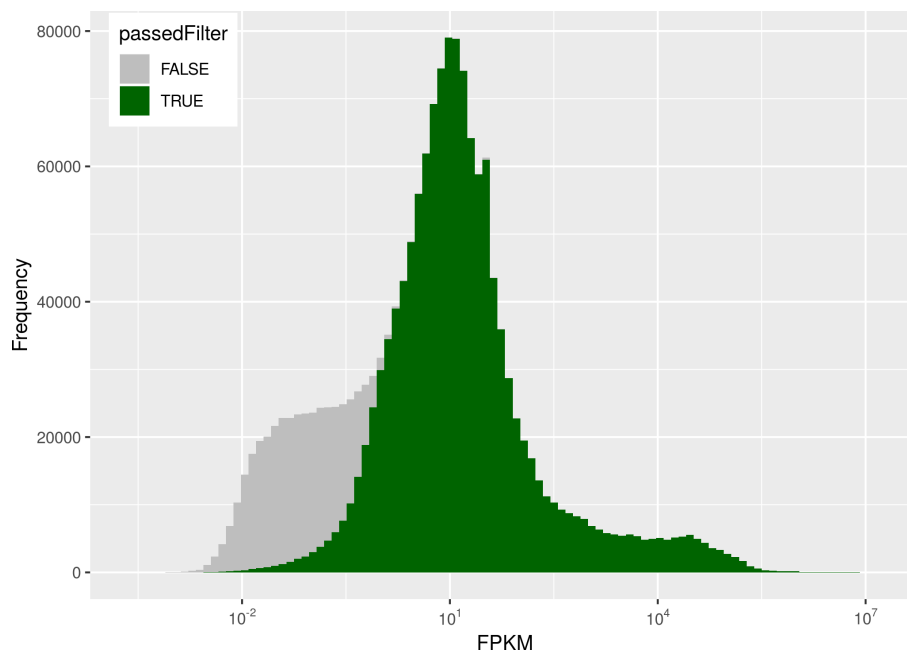




## OUTRIDER - OUTlier in RNA-Seq fInDER

```
# do the actual subsetting based on the filtering labels
ods <- ods[mcols(ods)$passedFilter,]
```

### 4.3 Controlling for Confounders

The next step in any analysis workflow is to visualize the correlations between samples. In most RNA-seq experiments correlations between the samples can be observed. These are often due to technical confounders (e.g. sequencing batch) or biological confounders (e.g. sex, age). These confounders can adversely affect the detection of aberrant features. Therefore, we provide options to control for them.

```
# Heatmap of the sample correlation
# it can also annotate the clusters resulting from the dendrogram
ods <- plotCountCorHeatmap(ods, normalized=FALSE, nCluster=4)
```

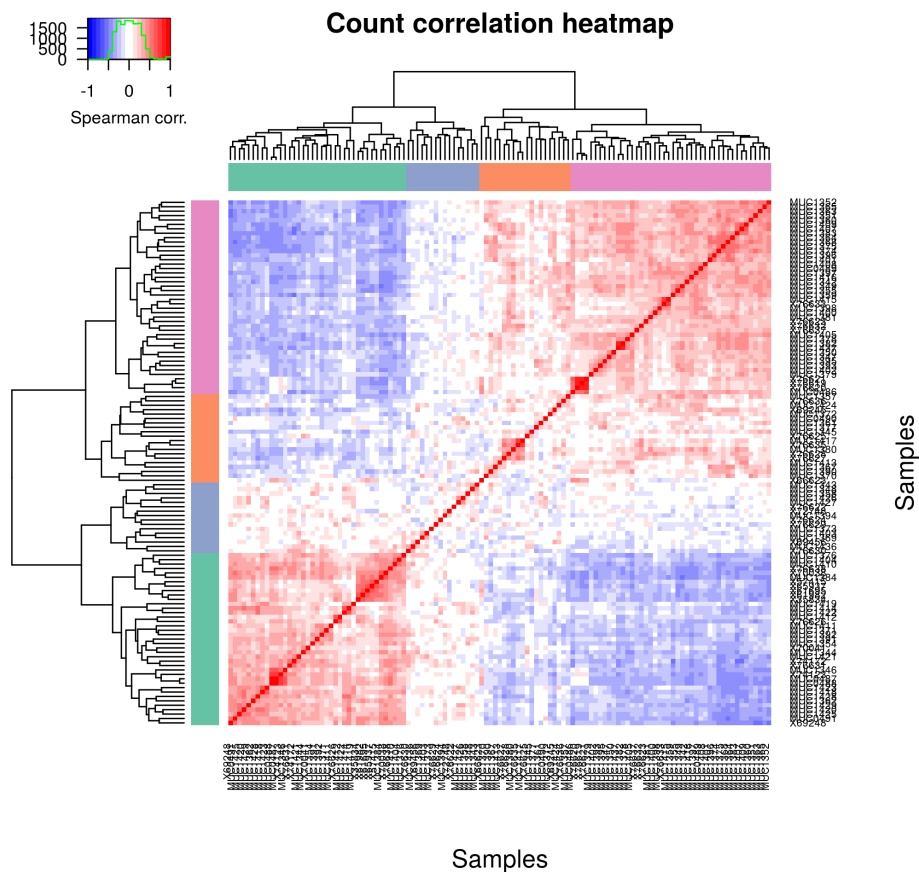

We have different ways to control for confounders present in the data. The first and standard way is to calculate the `sizeFactors` as done in `DESeq2[1]`.

## OUTRIDER - OUTlier in RNA-Seq fInDER


Additionally, the `controlForConfounders` function calls an autoencoder that automatically controls for confounders present in the data. Therefore an encoding dimension  $q$  needs to be set or the default value 20 is used. The optimal value of  $q$  can be determined using the `findEncodingDim` function. After controlling for confounders, the heatmap should be plotted again. If it worked, no batches should be present and the correlations between samples should be reduced and close to zero.

```
# automatically control for confounders
# we use only 5 iterations to make the vignette faster. The default is 15.
ods <- estimateSizeFactors(ods)
ods <- controlForConfounders(ods, q=21, iterations=5)

## [1] "Initial PCA loss: 6.03855058897392"
## [1] "Tue Dec 11 22:18:35 2018: Iteration: 1 loss: 5.44993055161773"
## [1] "Tue Dec 11 22:19:22 2018: Iteration: 2 loss: 5.4360900649003"
## [1] "Tue Dec 11 22:20:02 2018: Iteration: 3 loss: 5.42989295698697"
## [1] "Tue Dec 11 22:20:27 2018: Iteration: 4 loss: 5.42643742483098"
## [1] "Tue Dec 11 22:20:54 2018: Iteration: 5 loss: 5.42417639413476"
## Time difference of 3.096369 mins
## [1] "5 Final nb-AE loss: 5.42417639413476"

# Heatmap of the sample correlation after controlling
ods <- plotCountCorHeatmap(ods, normalized=TRUE)
```

## OUTRIDER - OUTlier in RNA-Seq fInDER

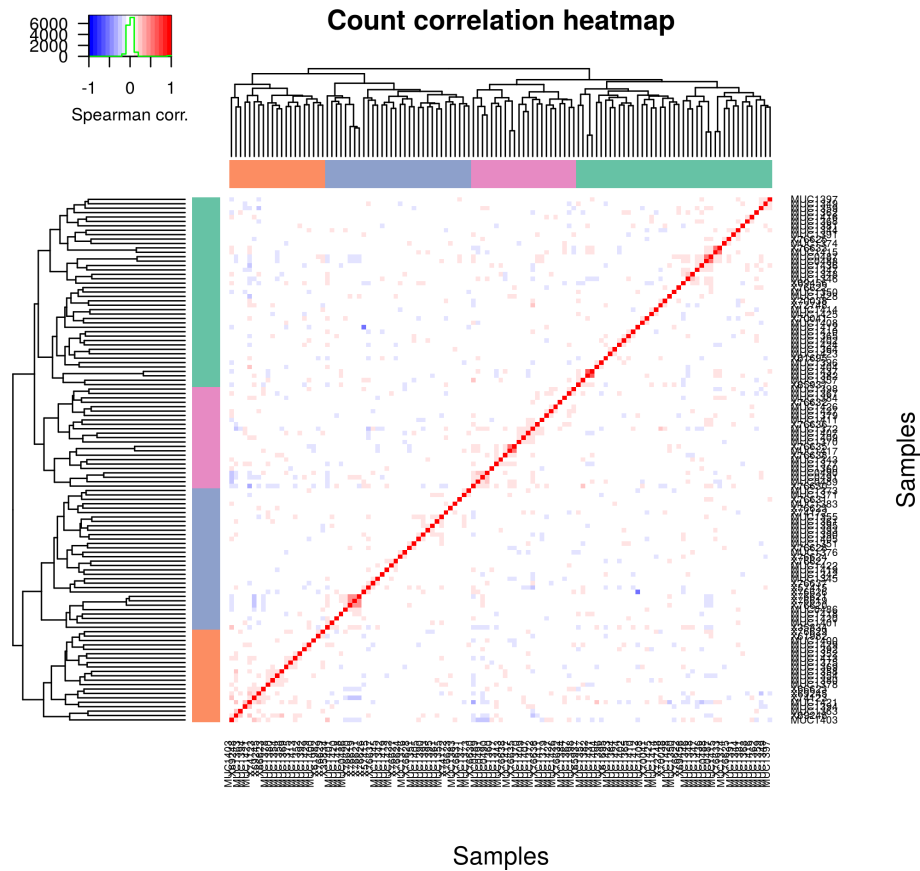

Alternatively, other methods can be used to control for confounders. In addition to the *autoencoder*, we implemented a PCA based approach. The PCA implementation can be utilized by setting `implementation="pca"`. Also PEER can be used together with the OUTRIDER framework. A detailed description on how to do this can be found in section 6.1. Furthermore, any other method can be used by providing the `normalizationFactor` matrix. This matrix must be computed beforehand using the appropriate method. Its purpose is to normalize for technical effects or control for additional expression patterns.

### 4.3.1 Excluding samples from the autoencoder fit

Since OUTRIDER expects that each sample within the population is independent of all others, replicates could mask effects specific to this sample. This is also true if trios are present in the data, where the parents can be seen as biological replicates. Here, we recommend to exclude the sample of interest or the replicates from the fitting. Later on, for all samples P-values are calculated.

In this rare disease data set we know that two samples (MUC1344 and MUC1365) have the same defect. To exclude one or both of them, we can use the `sampleExclusionMask` function.

## OUTRIDER - OUTlier in RNA-Seq flnDER

```
# set exclusion mask
sampleExclusionMask(ods) <- FALSE
sampleExclusionMask(ods[, "MUC1365"]) <- TRUE

# check which samples are excluded from the autoencoder fit
sampleExclusionMask(ods)

## X65937 X66623 X69245 X69248 X69456 X70038 X70041 X74123 X76619
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## X76620 X76621 MUC0486 MUC0487 MUC0488 MUC1346 MUC1377 MUC1393 MUC1394
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1395 MUC1423 MUC1429 MUC1342 MUC1343 X76631 MUC1344 X35834 MUC1345
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## X76624 X74172 X76635 MUC1417 X76630 X76622 X76623 MUC1403 MUC1347
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1348 X76636 X61695 MUC1349 X76626 MUC1352 MUC1402 X76638 X57415
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## X76628 MUC1380 MUC1351 MUC1350 X61982 MUC1354 MUC1355 MUC1357 MUC1358
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1359 MUC1360 MUC1361 MUC1405 MUC1408 MUC1362 X76632 X76637 MUC1363
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1364 X76633 MUC1415 MUC1404 MUC1365 X76625 X76627 MUC1379 MUC1367
## FALSE FALSE FALSE FALSE TRUE FALSE FALSE FALSE FALSE
## MUC1382 MUC1437 MUC1381 MUC1369 MUC1370 MUC1374 MUC1372 MUC1373 MUC1371
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## X76629 MUC1375 MUC1407 MUC1376 MUC1409 X72748 MUC1390 MUC1391 MUC1392
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1396 MUC1397 MUC1398 MUC1400 MUC0489 MUC0490 MUC0491 MUC1368 MUC1401
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1378 MUC1413 MUC1383 MUC1414 MUC1416 MUC1425 MUC1418 MUC1419 MUC1426
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1421 MUC1422 MUC1424 MUC1427 MUC1420 MUC1428 MUC1410 MUC1411 MUC1384
## FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE FALSE
## MUC1412 MUC1436
## FALSE FALSE
```

### 4.4 Fitting the negative binomial model

The fit of the negative binomial model is done during the autoencoder fitting. This step is only needed if alternative methods to control the data are used. To fit the dispersion and the mean, the `fit` function is applied to the *OutriderDataSet*.

```
# fit the model when alternative methods where used in the control step
ods <- fit(ods)
```

```
hist(theta(ods))
```

## 4.5 P-value calculation

After determining the fit parameters, two-sided P-values are computed using the following equation:

$$p_{ij} = 2 \cdot \min \left\{ \frac{1}{2}, \sum_0^{k_{ij}} NB(\mu_{ij}, \theta_i), 1 - \sum_0^{k_{ij}-1} NB(\mu_{ij}, \theta_i) \right\}, \quad 1$$

where the  $\frac{1}{2}$  term handles the case of both terms exceeding 0.5, which can happen due to the discrete nature of counts. Here  $\mu_{ij}$  are computed as the product of the fitted correction values from the autoencoder and the fitted mean adjustments. If required a one-sided test can be performed using the argument `alternative` and specifying 'less' or 'greater' depending on the research question. Multiple testing correction is done across all genes in a per-sample fashion using Benjamini-Yekutieli's false discovery rate method[5]. Alternatively, all adjustment methods supported by `p.adjust` can be used via the `method` argument.

```
# compute P-values (nominal and adjusted)
ods <- computePvalues(ods, alternative="two.sided", method="BY")
```

## 4.6 Z-score calculation

The Z-scores on the log transformed counts can be used for visualization, filtering, and ranking of samples. By running the `computeZscores` function, the Z-scores are computed and stored in the `OutriderDataSet` object. The Z-scores are calculated using:

$$z_{ij} = \frac{l_{ij} - \mu_j^l}{\sigma_j^l} \quad 2$$

$$l_{ij} = \log_2 \left( \frac{k_{ij} + 1}{c_{ij} + 1} \right),$$

where  $\mu_j^l$  is the mean and  $\sigma_j^l$  the standard deviation of gene  $j$  and  $l_{ij}$  is the log transformed count after correction for confounders.

```
# compute the Z-scores
ods <- computeZscores(ods)
```

## 5 Results

The *OUTRIDER* package offers multiple ways to display the results. It creates a results table containing all the values computed during the analysis. Furthermore, it offers various plot functions that guide the user through the analysis.

### 5.1 Results table

The *results* function gathers all the previously computed values and combines them into one table.

```
# get results (default only significant, padj < 0.05)
res <- results(ods)
head(res)
```

##	geneID	sampleID	pValue	padjust	zScore	l2fc	rawcounts
## 1:	NUDT12	X69456	1.691483e-22	1.946792e-17	-10.34	-7.93	0
## 2:	STAG2	X76636	1.215695e-21	1.399189e-16	-9.82	-1.89	622
## 3:	AB231724	MUC1346	8.250568e-18	9.495891e-13	4.40	1.00	1
## 4:	TALD01	MUC1410	9.159571e-18	1.054210e-12	-9.41	-3.27	482
## 5:	MCOLN1	MUC1361	8.171356e-16	9.404723e-11	-8.83	-2.41	150
## 6:	NLGN4Y	MUC1392	8.238413e-16	9.481902e-11	4.82	3.29	18

```
##      normcounts meanCorrected   theta aberrant AberrantBySample AberrantByGene
## 1:         0.00         448.91   19.61     TRUE                2             1
## 2:       1082.56       3964.36   84.61     TRUE                6             1
## 3:          1.03          0.03 1000.00     TRUE                2             1
## 4:        473.24       4569.15   27.80     TRUE                1             1
## 5:        151.17        802.83   42.38     TRUE                1             1
## 6:       1255.76        86.72   39.79     TRUE                2             1
##      padj_rank
## 1:           1
## 2:           1
## 3:           1
## 4:           1
## 5:           1
## 6:           1

dim(res)

## [1] 269 14

# setting a different significance level and filtering by Z-scores
res <- results(ods, padjCutoff=0.1, zScoreCutoff=2)
head(res)
```

##	geneID	sampleID	pValue	padjust	zScore	l2fc	rawcounts
----	--------	----------	--------	---------	--------	------	-----------

## OUTRIDER - OUTlier in RNA-Seq flnDER

```
## 1:  NUDT12  X69456 1.691483e-22 1.946792e-17 -10.34 -7.93 0
## 2:  STAG2   X76636 1.215695e-21 1.399189e-16 -9.82 -1.89 622
## 3:  AB231724 MUC1346 8.250568e-18 9.495891e-13 4.40 1.00 1
## 4:  TALD01  MUC1410 9.159571e-18 1.054210e-12 -9.41 -3.27 482
## 5:  MCOLN1  MUC1361 8.171356e-16 9.404723e-11 -8.83 -2.41 150
## 6:  NLGN4Y  MUC1392 8.238413e-16 9.481902e-11 4.82 3.29 18
##      normcounts meanCorrected  theta aberrant AberrantBySample AberrantByGene
## 1:      0.00      447.11  19.61    TRUE           2           1
## 2:    1080.26    3950.58  84.61    TRUE           6           1
## 3:      1.03       0.03 1000.00    TRUE           3           1
## 4:    470.73    4545.27  27.80    TRUE           1           1
## 5:    149.38     794.99  42.38    TRUE           1           1
## 6:    1326.64     91.21  39.79    TRUE           2           1
##      padj_rank
## 1:      1
## 2:      1
## 3:      1
## 4:      1
## 5:      1
## 6:      1
dim(res)
## [1] 328 14
```

## 5.2 Number of aberrant genes per sample

One quantity of interest is the number of aberrantly expressed genes per sample. This can be displayed using the plotting function `plotAberrantPerSample`. Alternatively, the function `aberrant` can be used to identify aberrant events, which can be summed by sample or gene using the parameter `by`. These numbers depend on the cutoffs, which can be specified in both functions (`padjCutoff` and `zScoreCutoff`).

```
# number of aberrant genes per sample
tail(sort(aberrant(ods, by="sample")))


## MUC1363 MUC1421 MUC1408 MUC1403 MUC1362 X74172
##      7      7      8      10      10      35

tail(sort(aberrant(ods, by="gene", zScoreCutoff=1)))

##      ZFAT      DNAJC3 SLM02-ATP5E      NXT2      RPS4Y1      PRKY
##      2      2      2      2      2      2

# plot the aberrant events per sample
plotAberrantPerSample(ods, padjCutoff=0.05)
```

## OUTRIDER - OUTlier in RNA-Seq fInDER

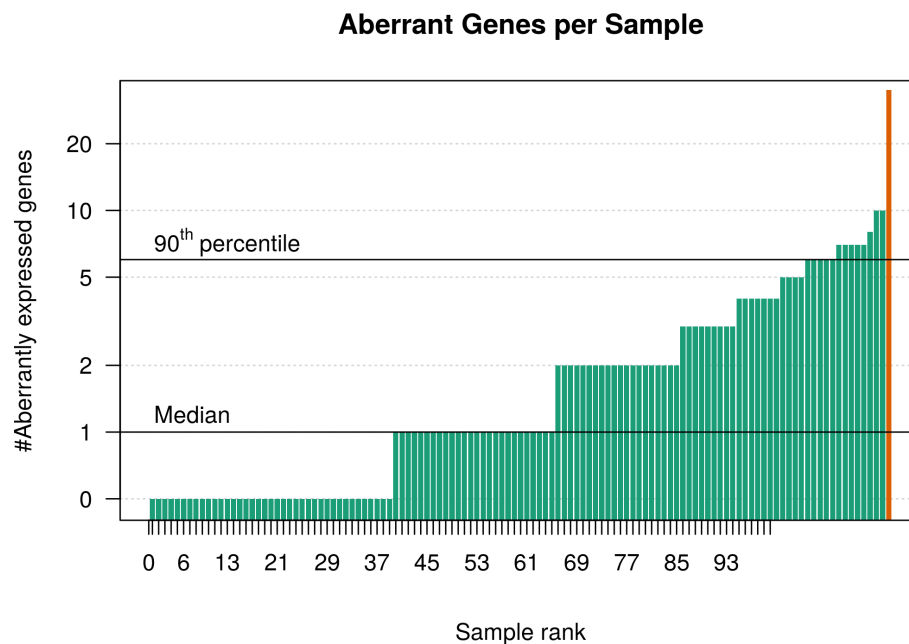


### 5.3 Volcano plots

To view the distribution of P-values on a sample level, volcano plots can be displayed. Most of the plots make use of the [plotly](#) framework to create interactive plots. To only use basic R functionality from [graphics](#) the `basePlot` argument can be set to `TRUE`.

```
# MUC1344 is a diagnosed sample from Kremer et al.  
plotVolcano(ods, "MUC1344", basePlot=TRUE)
```



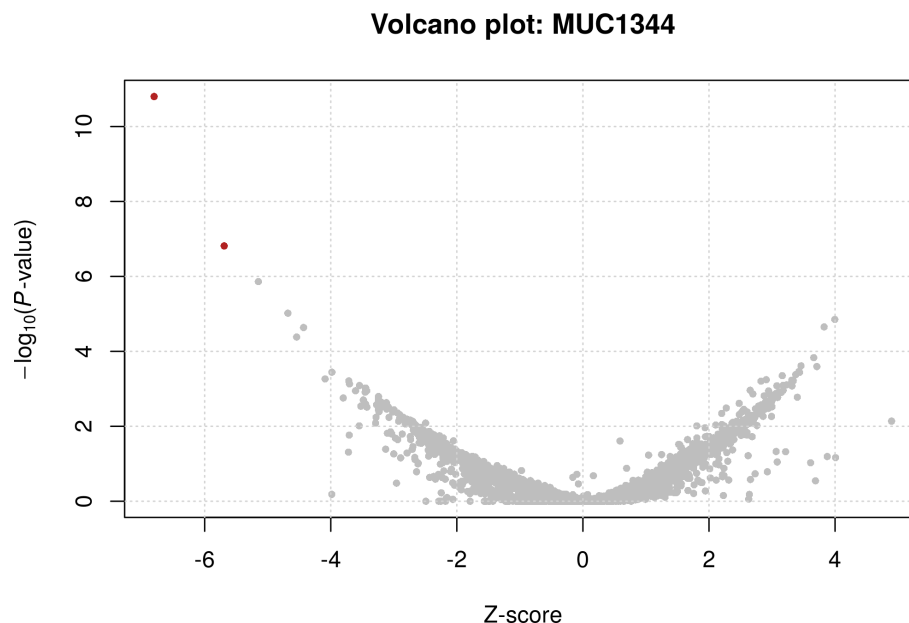


### 5.4 Gene level plots

Additionally, we include two plots at the gene level. `plotExpressionRank` plots the counts in ascending order. By default, the controlled counts are plotted. To plot raw counts, the argument `normalized` can be set to `FALSE`.

When using the `plotly` framework for plotting, all computed values are displayed for each data point. The user can access this information by hovering over each data point with the mouse.


```
# expression rank of a gene with outlier events  
plotExpressionRank(ods, "TIMMDC1", basePlot=TRUE)
```

## OUTRIDER - OUTlier in RNA-Seq flnDER

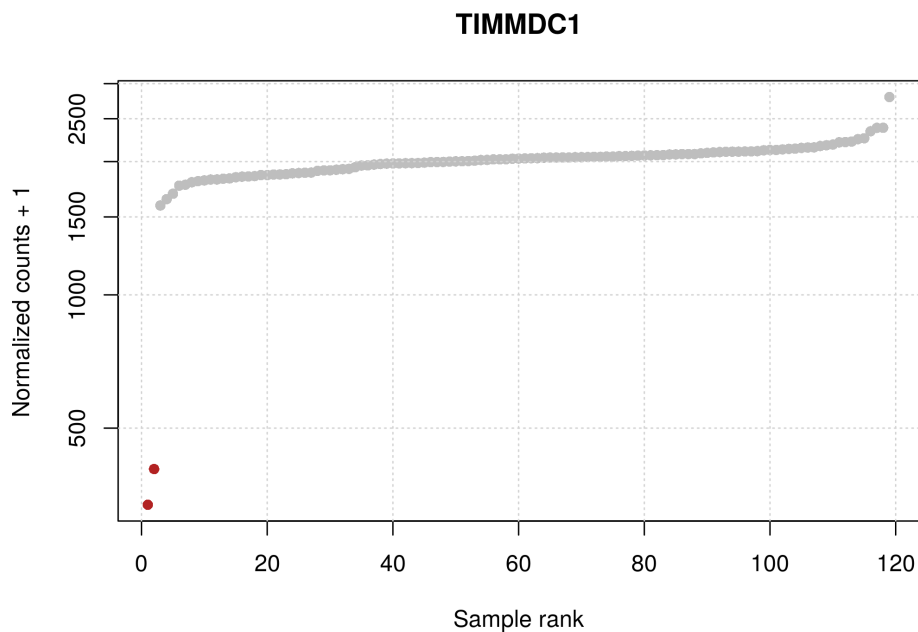

The quantile-quantile plot can be used to see whether the fit converged well. In presence of an outlier, it can happen that most of the points end up below the confidence band. This is fine and indicates that we have conservative P-values for the other points. Here is an example with two outliers:

```
## QQ-plot for a given gene  
plotQQ(ods, "TIMMDC1")
```

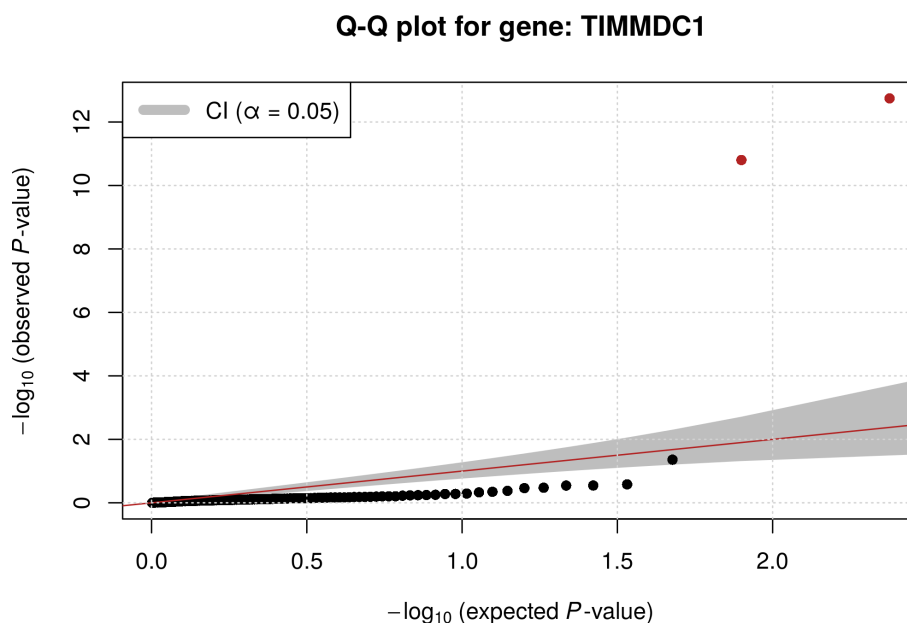

## 6 Additional features

### 6.1 Using PEER to control for confounders

PEER[6] is a well known tool to control for unknown effects in RNA-seq data. PEER is only available through the *peer* GitHub repository. The R source code can be downloaded from here: [https://github.com/downloads/PMBio/peer/R\\_peer\\_source\\_1.3.tgz](https://github.com/downloads/PMBio/peer/R_peer_source_1.3.tgz). The installation of the package has to be done manually by the user. After the installation one can use the following function to control for confounders with PEER.

```
#'
#' PEER implementation
#'  
peer <- function(ods, maxFactors=NA, maxItr=1000){  
  
  # check for PEER  
  if(!require(peer)){  
    stop("Please install the 'peer' package from GitHub to use this ",  
         "functionality.")  
  }  
  
  # default and recommendation by PEER: min(0.25*n, 100)  
  if(is.na(maxFactors)){  
    maxFactors <- min(as.integer(0.25* ncol(ods)), 100)  
  }  
  
  # log counts  
  logCts <- log2(t(t(counts(ods)+1)/sizeFactors(ods)))  
  
  # prepare PEER model  
  model <- PEER()  
  PEER_setNmax_iterations(model, maxItr)  
  PEER_setNk(model, maxFactors)  
  PEER_setPhenoMean(model, logCts)  
  PEER_setAdd_mean(model, TRUE)  
  
  # run fullpeer pipeline  
  PEER_update(model)  
  
  # extract PEER data  
  peerResiduals <- PEER_getResiduals(model)  
  peerMean <- t(t(2^(logCts - peerResiduals)) * sizeFactors(ods))  
  
  # save model in object
```

## OUTRIDER - OUTlier in RNA-Seq fInDER

```
normalizationFactors(ods) <- pmax(peerMean, 1E-8)
metadata(ods)[["PEER_model"]] <- list(
  alpha      = PEER_getAlpha(model),
  residuals  = PEER_getResiduals(model),
  W          = PEER_getW(model))

return(ods)
}
```

With the function above we can run the full OUTRIDER pipeline as follows:

```
# Control for confounders with PEER
ods <- estimateSizeFactors(ods)
ods <- peer(ods)
ods <- fit(ods)
ods <- computeZscores(ods, peerResiduals=TRUE)
ods <- computePvalues(ods)


# Heatmap of the sample correlation after controlling
ods <- plotCountCorHeatmap(ods, normalized=TRUE)
```

## 6.2 Power analysis

We provide the `plotPowerAnalysis` function to show, what kind of changes can be significant depending on the mean count.

```
## P-values versus Mean Count
plotPowerAnalysis(ods)
```

## OUTRIDER - OUTlier in RNA-Seq fInDER

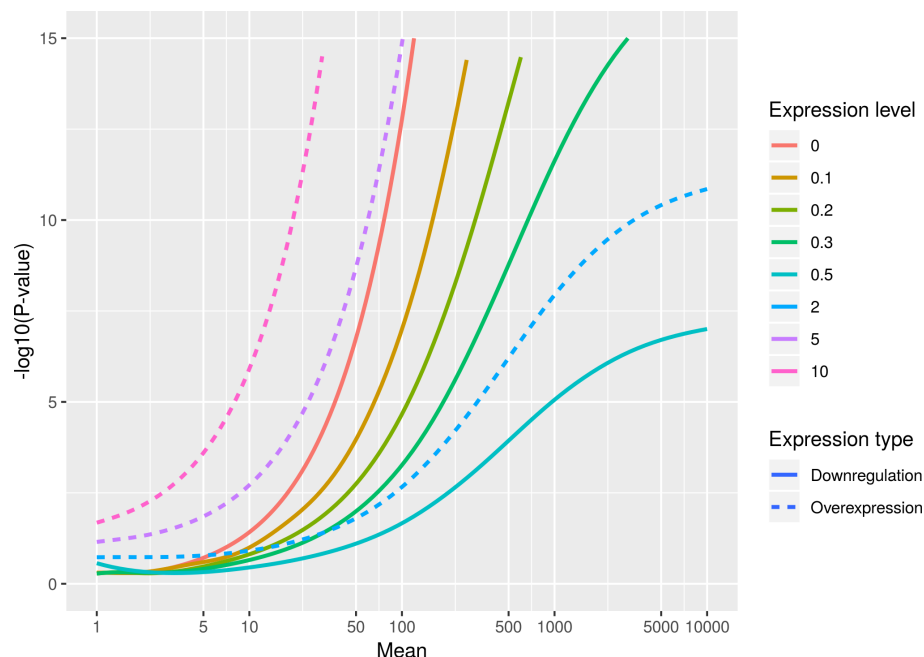

Here, we see that it is only for sufficiently high expressed genes possible, to obtain significant P-values, especially for the downregulation cases.

## References

- [1] Michael I Love, Wolfgang Huber, and Simon Anders. Moderated estimation of fold change and dispersion for RNA-seq data with DESeq2. *Genome Biology*, 15(12):550, dec 2014. URL: <http://genomebiology.biomedcentral.com/articles/10.1186/s13059-014-0550-8>, doi:10.1186/s13059-014-0550-8.
- [2] Mark D Robinson, Davis J. McCarthy, and Gordon K Smyth. edgeR: a Bioconductor package for differential expression analysis of digital gene expression data. *Bioinformatics (Oxford, England)*, 26(1):139–40, jan 2010. URL: <https://doi.org/10.1093/bioinformatics/btp616>, doi:10.1093/bioinformatics/btp616.
- [3] Alexander Dobin, Carrie A. Davis, Felix Schlesinger, Jorg Drenkow, Chris Zaleski, Sonali Jha, Philippe Batut, Mark Chaisson, and Thomas R. Gingeras. STAR: Ultrafast universal RNA-seq aligner. *Bioinformatics*, 29(1):15–21, 2013. URL: <https://doi.org/10.1093/bioinformatics/bts635>, doi:10.1093/bioinformatics/bts635.
- [4] Laura S Kremer, Daniel M Bader, Christian Mertes, Robert Kopajtich, Garwin Pichler, Arcangela Iuso, Tobias B Haack, Elisabeth Graf, Thomas Schwarzmayer, Caterina Terrile, Eliška Kořáková, Birgit Repp, Gabi Kastenmüller, Jerzy Adamski, Peter Lichtner, Christoph Leonhardt, Benoit Funalot, Alice Donati, Valeria Tiranti, Anne Lombes, Claude Jardel, Dieter Gläser, Robert W

## OUTRIDER - OUTlier in RNA-Seq flnDER

Taylor, Daniele Ghezzi, Johannes A Mayr, Agnes Rötig, Peter Freisinger, Felix Distelmaier, Tim M Strom, Thomas Meitinger, Julien Gagneur, and Holger Prokisch. Genetic diagnosis of Mendelian disorders via RNA sequencing. *Nature Communications*, 8:15824, jun 2017. URL: <https://www.nature.com/articles/ncomms15824.pdf>, doi:10.1038/ncomms15824.

- [5] Yoav Benjamini and Daniel Yekutieli. The control of the false discovery rate in multiple testing under dependency. *Annals of Statistics*, 29(4):1165–1188, 2001. URL: <https://projecteuclid.org/euclid.aos/1013699998>, arXiv:0801.1095, doi:10.1214/aos/1013699998.
- [6] Oliver Stegle, Leopold Parts, Matias Piipari, John Winn, and Richard Durbin. Using probabilistic estimation of expression residuals (PEER) to obtain increased power and interpretability of gene expression analyses. *Nature Protocols*, 7(3):500–507, 2012. doi:10.1038/nprot.2011.457.

## Session info

Here is the output of `sessionInfo()` on the system on which this document was compiled:

```
## R version 3.5.1 Patched (2018-07-12 r74967)
## Platform: x86_64-pc-linux-gnu (64-bit)
## Running under: Ubuntu 16.04.5 LTS
##
## Matrix products: default
## BLAS: /home/biocbuild/bbs-3.8-bioc/R/lib/libRblas.so
## LAPACK: /home/biocbuild/bbs-3.8-bioc/R/lib/libRlapack.so
##
## locale:
##  [1] LC_CTYPE=en_US.UTF-8      LC_NUMERIC=C
##  [3] LC_TIME=en_US.UTF-8      LC_COLLATE=C
##  [5] LC_MONETARY=en_US.UTF-8  LC_MESSAGES=en_US.UTF-8
##  [7] LC_PAPER=en_US.UTF-8     LC_NAME=C
##  [9] LC_ADDRESS=C             LC_TELEPHONE=C
## [11] LC_MEASUREMENT=en_US.UTF-8 LC_IDENTIFICATION=C
##
## attached base packages:
## [1] stats4      parallel  stats      graphics  grDevices  utils      datasets
## [8] methods    base
##
## other attached packages:
##  [1] org.Hs.eg.db_3.7.0
##  [2] TxDb.Hsapiens.UCSC.hg19.knownGene_3.2.2
##  [3] beeswarm_0.2.3
```

## OUTRIDER - OUTlier in RNA-Seq fInDER

```
## [4] OUTRIDER_1.0.1
## [5] data.table_1.11.8
## [6] SummarizedExperiment_1.12.0
## [7] DelayedArray_0.8.0
## [8] matrixStats_0.54.0
## [9] GenomicFeatures_1.34.1
## [10] AnnotationDbi_1.44.0
## [11] Biobase_2.42.0
## [12] GenomicRanges_1.34.0
## [13] GenomeInfoDb_1.18.1
## [14] IRanges_2.16.0
## [15] S4Vectors_0.20.1
## [16] BiocGenerics_0.28.0
## [17] BiocParallel_1.16.2
## [18] knitr_1.21
##
## loaded via a namespace (and not attached):
## [1] colorspace_1.3-2          htmlTable_1.12
## [3] XVector_0.22.0            base64enc_0.1-3
## [5] rstudioapi_0.8            ggpubr_0.2
## [7] bit64_0.9-7               codetools_0.2-15
## [9] splines_3.5.1             PRROC_1.3.1
## [11] geneplotter_1.60.0        Formula_1.2-3
## [13] jsonlite_1.6              Rsamtools_1.34.0
## [15] annotate_1.60.0           cluster_2.0.7-1
## [17] BiocManager_1.30.4        compiler_3.5.1
## [19] httr_1.4.0                backports_1.1.2
## [21] assertthat_0.2.0          Matrix_1.2-15
## [23] lazyeval_0.2.1            acepack_1.4.1
## [25] htmltools_0.3.6           prettyunits_1.0.2
## [27] tools_3.5.1               bindrcpp_0.2.2
## [29] gtable_0.2.0              glue_1.3.0
## [31] GenomeInfoDbData_1.2.0    reshape2_1.4.3
## [33] dplyr_0.7.8               Rcpp_1.0.0
## [35] Biostrings_2.50.1         gdata_2.18.0
## [37] rtracklayer_1.42.1        xfun_0.4
## [39] stringr_1.3.1             gtools_3.8.1
## [41] XML_3.98-1.16             zlibbioc_1.28.0
## [43] scales_1.0.0              BiocStyle_2.10.0
## [45] pcaMethods_1.74.0         hms_0.4.2
## [47] RColorBrewer_1.1-2        BBmisc_1.11
## [49] yaml_2.2.0                memoise_1.1.0
## [51] reticulate_1.10           gridExtra_2.3
## [53] ggplot2_3.1.0             biomaRt_2.38.0
## [55] rpart_4.1-13              latticeExtra_0.6-28
```

## OUTRIDER - OUTlier in RNA-Seq flnDER

```
## [57] stringi_1.2.4      RSQLite_2.1.1
## [59] highr_0.7          genefilter_1.64.0
## [61] checkmate_1.8.5    caTools_1.17.1.1
## [63] rlang_0.3.0.1      pkgconfig_2.0.2
## [65] bitops_1.0-6       evaluate_0.12
## [67] lattice_0.20-38    purrr_0.2.5
## [69] bindr_0.1.1        GenomicAlignments_1.18.0
## [71] htmlwidgets_1.3    labeling_0.3
## [73] bit_1.1-14         tidyselect_0.2.5
## [75] plyr_1.8.4         magrittr_1.5
## [77] DESeq2_1.22.1      R6_2.3.0
## [79] gplots_3.0.1       Hmisc_4.1-1
## [81] DBI_1.0.0          pillar_1.3.0
## [83] foreign_0.8-71     survival_2.43-3
## [85] RCurl_1.95-4.11    nnet_7.3-12
## [87] tibble_1.4.2       crayon_1.3.4
## [89] KernSmooth_2.23-15 plotly_4.8.0
## [91] rmarkdown_1.11     progress_1.2.0
## [93] locfit_1.5-9.1     grid_3.5.1
## [95] blob_1.1.1         digest_0.6.18
## [97] xtable_1.8-3       tidyr_0.8.2
## [99] munsell_0.5.0      viridisLite_0.3.0
```